


VSC IPT5BLS3AF28D

5MP Network IR Water-proof
Bullet Camera



- 5MP (2592 × 1944) H.265 coding
- Max.resolution: 2592 × 1944
- ICR auto switch, true day / night, ROI coding
- 3D DNR, digital WDR, HLC, BLC, defog
- 20~30m IR night view distance
- DC12V/PoE power supply
- IP 67 ingress protection
- Support three streams
- P2P function (optional)
- Support remote monitoring by smart phones& tablets with iOS and Android OS
- Intelligent analytics (optional): object removal detection, abnormal video signal detection, line crossing detection and intrusion detection

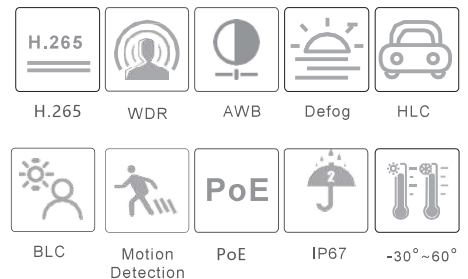

visarcctv.com

For more information, please visit our website


SPECIFICATIONS

Specifications	Model	VSC IPT5BLS3AF28D
Camera		
Image Sensor	1 / 2.7 "CMOS	
Image Size	2592×1944	
Electronic Shutter	1 / 25 s ~ 1 / 100000 s	
Iris Type	Fixed Iris	
Min. Illumination	0.0236 lux @F2.0, AGC ON; 0 lux with IR 0.0085 lux @ F1.2, AGC ON; 0 lux with IR	
Lens	2.8 mm @F1.85, horizontal field of view:93.4° 3.6 mm @F2.0, horizontal field of view:79.4°	
Lens Mount	M12	
Wide Dynamic Range	Digital WDR	
BLC	Yes	
HLC	Yes	
Defog	Yes	
Digital NR	3D DNR	
Angle Adjustment	Pan: 0°~360°; Tilt:0°~80°; Rotation: 0°~360°	
Image		
Video Compression	H.265 / H.264	
H.265 Compression Standard	Main Profile / High Tier	
Resolution	5MP (2592 × 1944), 4MP (2560 × 1440), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240	
Main Stream	60Hz : 5MP(1~20fps)/4MP(1~30fps)/ 1080P(1~30fps)/ 720P(1~30fps) 50Hz : 5MP(1~20fps)/ 4MP (1~25fps) / 1080P (1~25fps) / 720P (1~25fps)	
Sub Stream	60Hz : 720P (1~15fps)/D1 (1~30fps)/CIF (1~30fps); 50HZ:720P (1~12fps)/D1 (1~25fps)/CIF (1~25fps)	
Third Stream	60Hz : D1/CIF/480x240 (1~30fps); 50HZ: D1/CIF/480x240 (1~25fps)	
Bit Rate	64 Kbps ~ 5 Mbps	
Bit Rate Type	VBR / CBR	
Audio Compression	No	
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser	
ROI	Each ROI to be configured separately	
Interfaces		
Network	RJ45	
Video Output	No	
Audio	No	
Storage	No	
Hardware Reset	No	
Functions		
Remote Monitoring	Web browsing, CMS remote control	
Online Connection	Support simultaneous monitoring for up to 4 users; Support multi-stream real time transmission	
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, 802.1x, UPnP, HTTP, HTTPS, QoS	
Interface Protocol	ONVIF, GB-T/28181-2011	
Storage	Network remote storage	
Smart Alarm	Motion detection	
General Function	Watermark, IP address filtering, video mask, heartbeat, password protection	
Intelligent Analytics	Object removal detection, abnormal video signal detection, intrusion detection and line crossing detection (optional)	
PoE	Yes	
IR Distance	20 ~ 30 m	
Ingress Protection	IP67	

Others

Power Supply	DC12V/PoE
Power Consumption	< 5W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions (mm)	167.5 × 74.5 × 74.5
Weight (net)	Approx. 0.38KG
Installation	Ceiling mounting; Wall mounting

DIMENSIONS

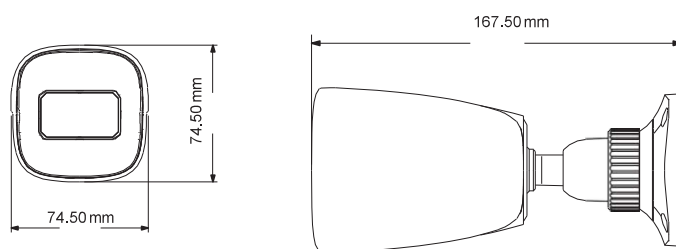

AVAILABLE ACCESSORIES



VSB IPT9